

# TRUXPORT®

*Another Fine Tonneau Cover by TruXedo*

## Owners & Installation Manual

**READ INSTRUCTIONS - Failure to assemble cover properly will void warranty.**



Damaged or missing parts?  
Call **1-877-878-9336**  
Mon - Fri 8 am - 5 pm CT  
Parts will be shipped to you factory direct.  
Do not return kit to place of purchase.

Specify length or make and  
model of vehicle to inquire  
about headers, cover, side  
rails, or bows.


**Tools Required:**  
1/2" Socket

## TruXedo, Inc.


P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078  
Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) FAX: (605) 664-9304  
Visit Us Online: <http://www.truxedo.com>

P/N 1116032 Rev U


**1 Install weather seal on cab end corner plugs:**

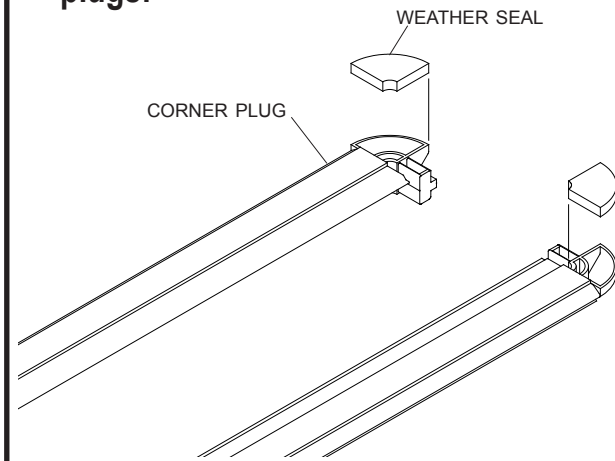

**2 Set cover assembly on front bulkhead:**

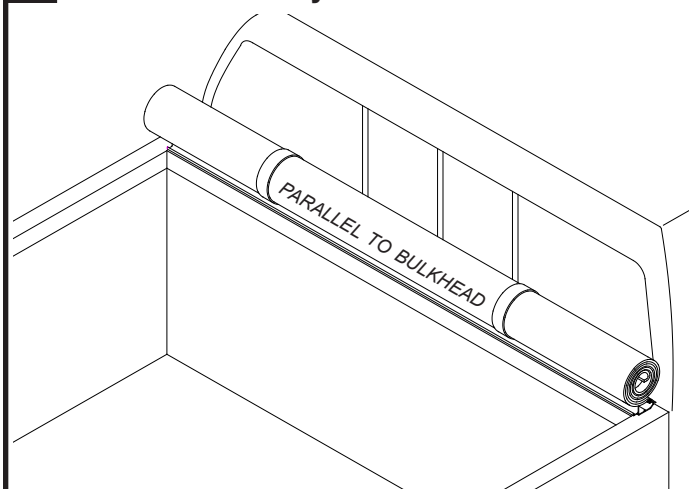

**3 Place side rails on pickup bed rails. Assemble clamps. Place rear clamps loosely over side rails & pickup bed rails. Insert side rail corner plugs into header:**

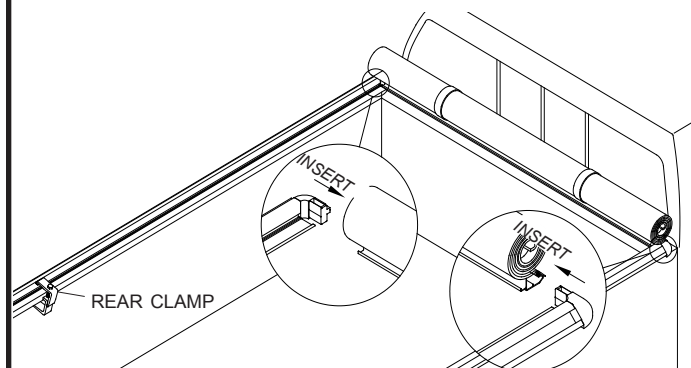


**4**

**NOTE:**


Additional weather seal may be required for pickups with bed caps, tailgate protectors, or liners. Add weather seal if needed to seal appropriately.

**5 Place remaining clamps loosely over side rails & pickup bed rails:**

PLACE THREE CLAMPS ON EACH SIDE RAIL TO KEEP RAILS IN PLACE

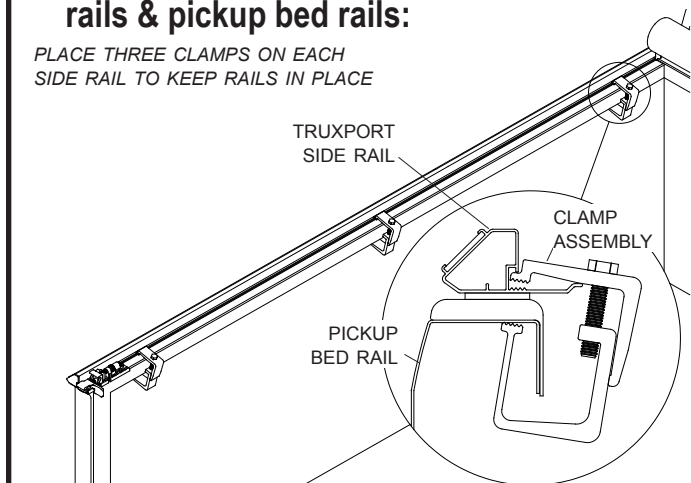

**6 Align cover with pickup bed:**

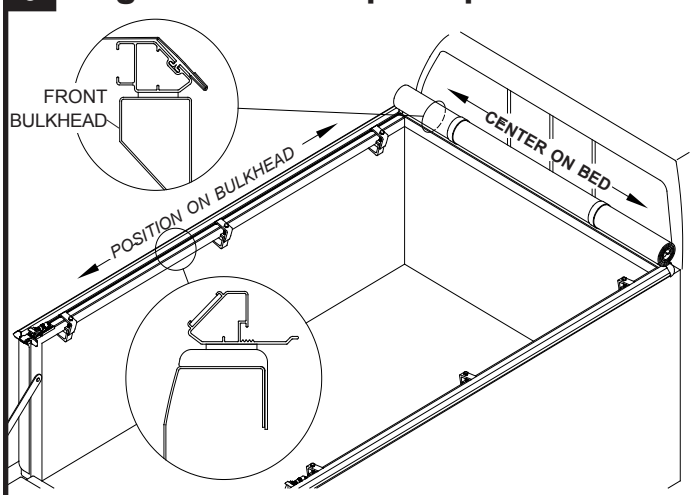


**TruXedo, Inc.**

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078  
Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304  
Visit Us Online: <http://www.truxedo.com>




P/N 1116032 Rev U

## 7 Tighten front clamps:

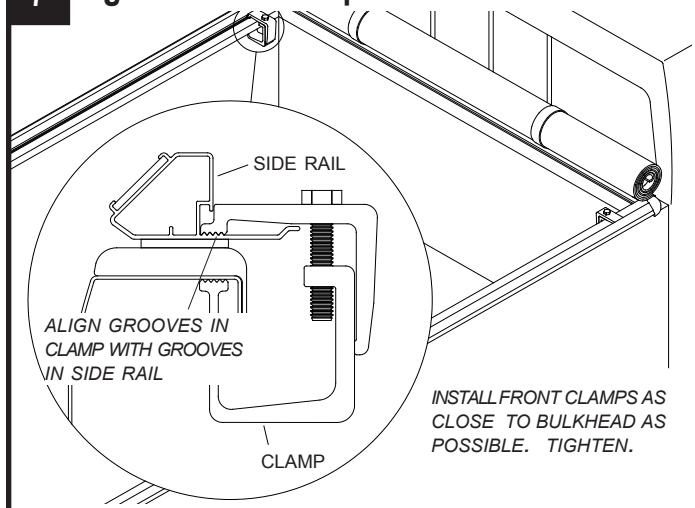


## 8 Center side rails on pickup bed:

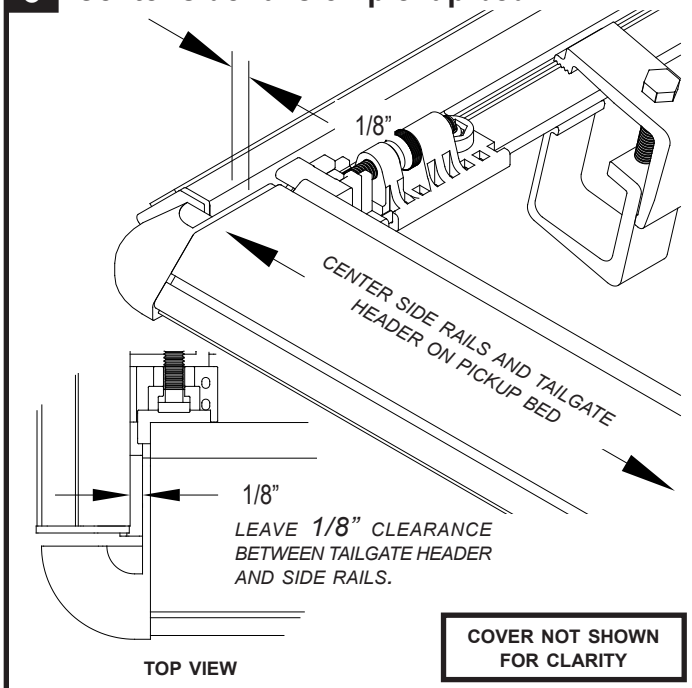

## 9 Tighten clamps at tailgate:

FOLD BACK HEADER AND COVER, WHILE HOLDING SIDE RAIL IN PLACE (SEE STEP 8). TIGHTEN CLAMP. REPEAT ON OPPOSITE SIDE RAIL.


CHECK AND ADJUST AS NEEDED.

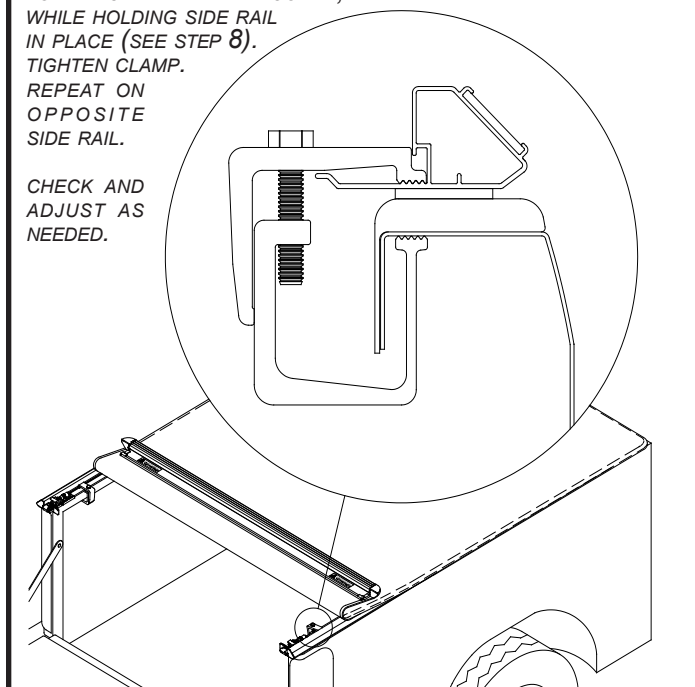


## 10 Tighten center clamps:

OPEN COVER PAST CENTER BOW. SLIDE CLAMPS TO TAILGATE SIDE OF BOW, THEN TIGHTEN CLAMPS.

DO NOT PLACE CLAMPS DIRECTLY UNDER CENTER BOW

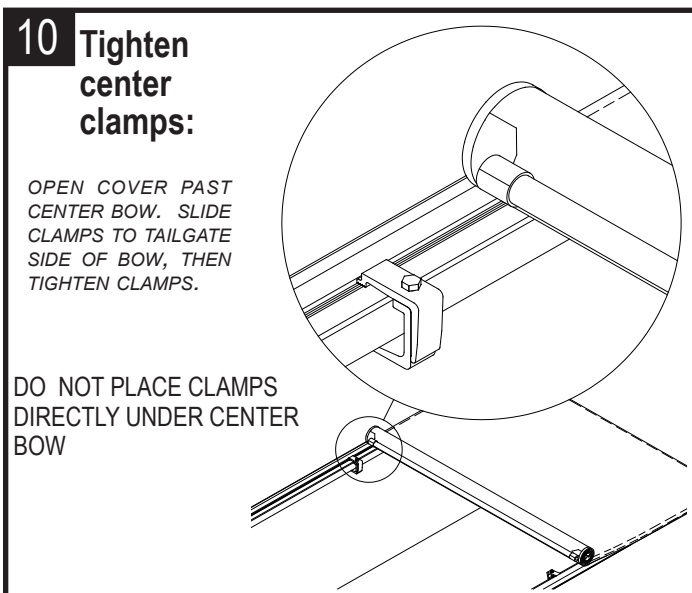

## 11 Install weather seal on tailgate corner plugs:

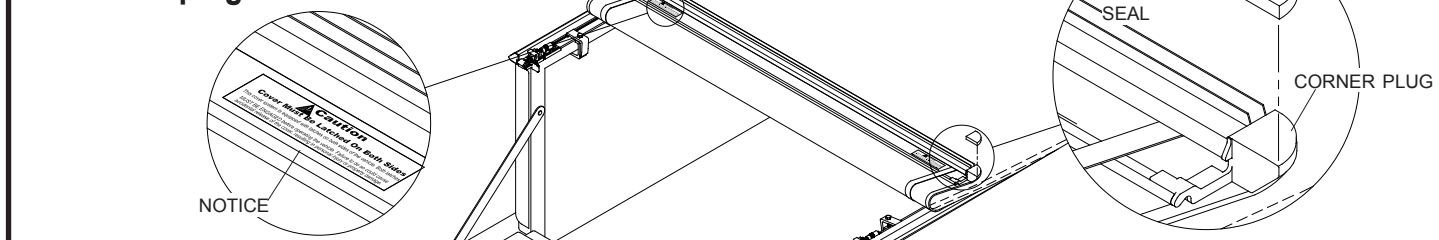





**TruXedo, Inc.**

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078  
Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304  
Visit Us Online: <http://www.truxedo.com>

**TRUXPORT**  
Another Fine Tonneau Cover by TruXedo

P/N 1116032 Rev U

## 12 Close cover:

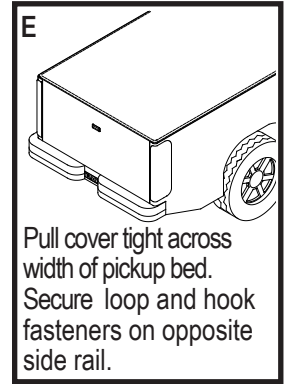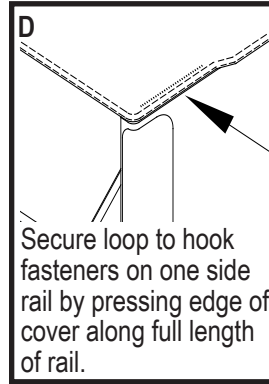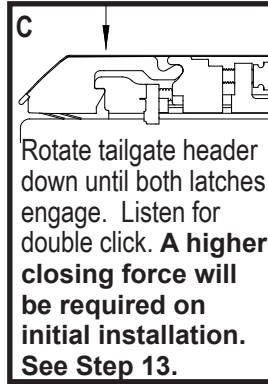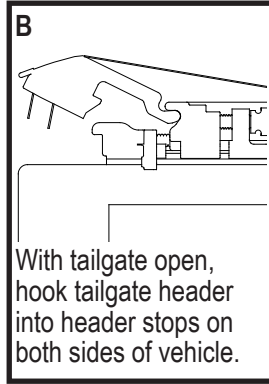


- To prevent accidental release of tailgate header, ensure header is securely latched to side rails on both sides of pickup bed before driving vehicle.
- To prevent wind lift, secure loop and hook fasteners along entire length of both side rails before driving vehicle.

## 13 Adjust cover tension:

- A. To adjust tension, open cover slightly. Locate tension adjustment nut at tailgate end of each side rail. Turn nut to widen or reduce gap between header stop and tension adjustment base. Increasing width of gap will increase tension. Reducing gap width will reduce tension. **A higher closing force will be required on initial installation. Turn tension adjustment nut to reduce gap between tension adjustment base. Lift cover Velcro® from side rail Velcro®. Repeat step 12. Cover will initially stretch making the next closing easier.**

- B. Close cover and recheck tension. Repeat as required to achieve desired cover tension.





- For best performance, and to protect your cover against wind wear, adjust tension regularly.
- Check cover tension after installation, seasonally, and after extreme temperature changes.
- Set tension during the warmest part of the day.

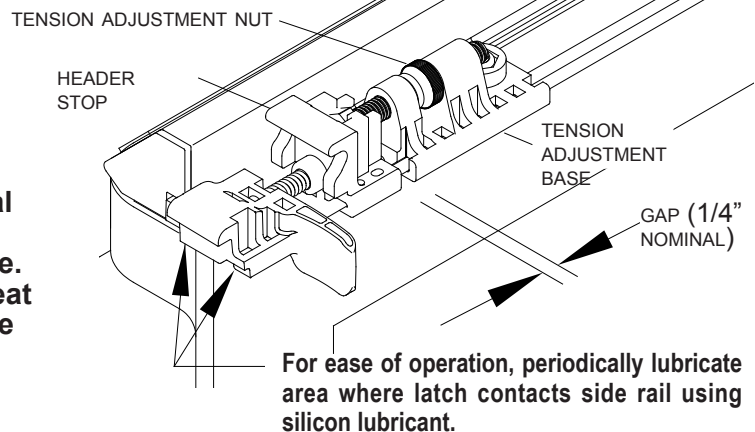

**NOTE:** Cover is designed to have optimal tension when there is a 1/4" gap between the header stop and the tension adjustment base.

**Do not over tighten cover. If cover is too tight, it will not latch easily.**

## 14 Open cover:

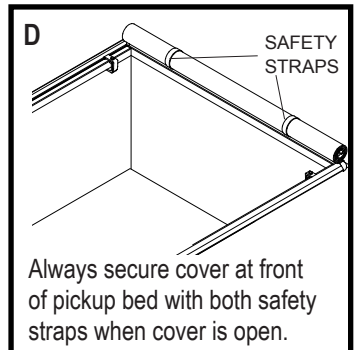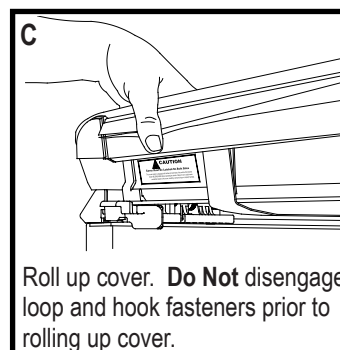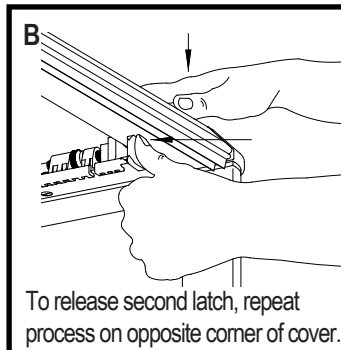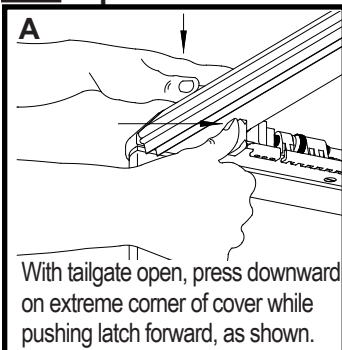


**IMPORTANT:** Press down only on extreme corners of cover while opening cover, or opposite corner of cover may re-latch.

**TruXedo, Inc.**

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078  
 Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304  
 Visit Us Online: <http://www.truxedo.com>

**TRUXPORT**  
 Another Fine Tonneau Cover by TruXedo  
 P/N 1116032 Rev U

## Replacement Parts

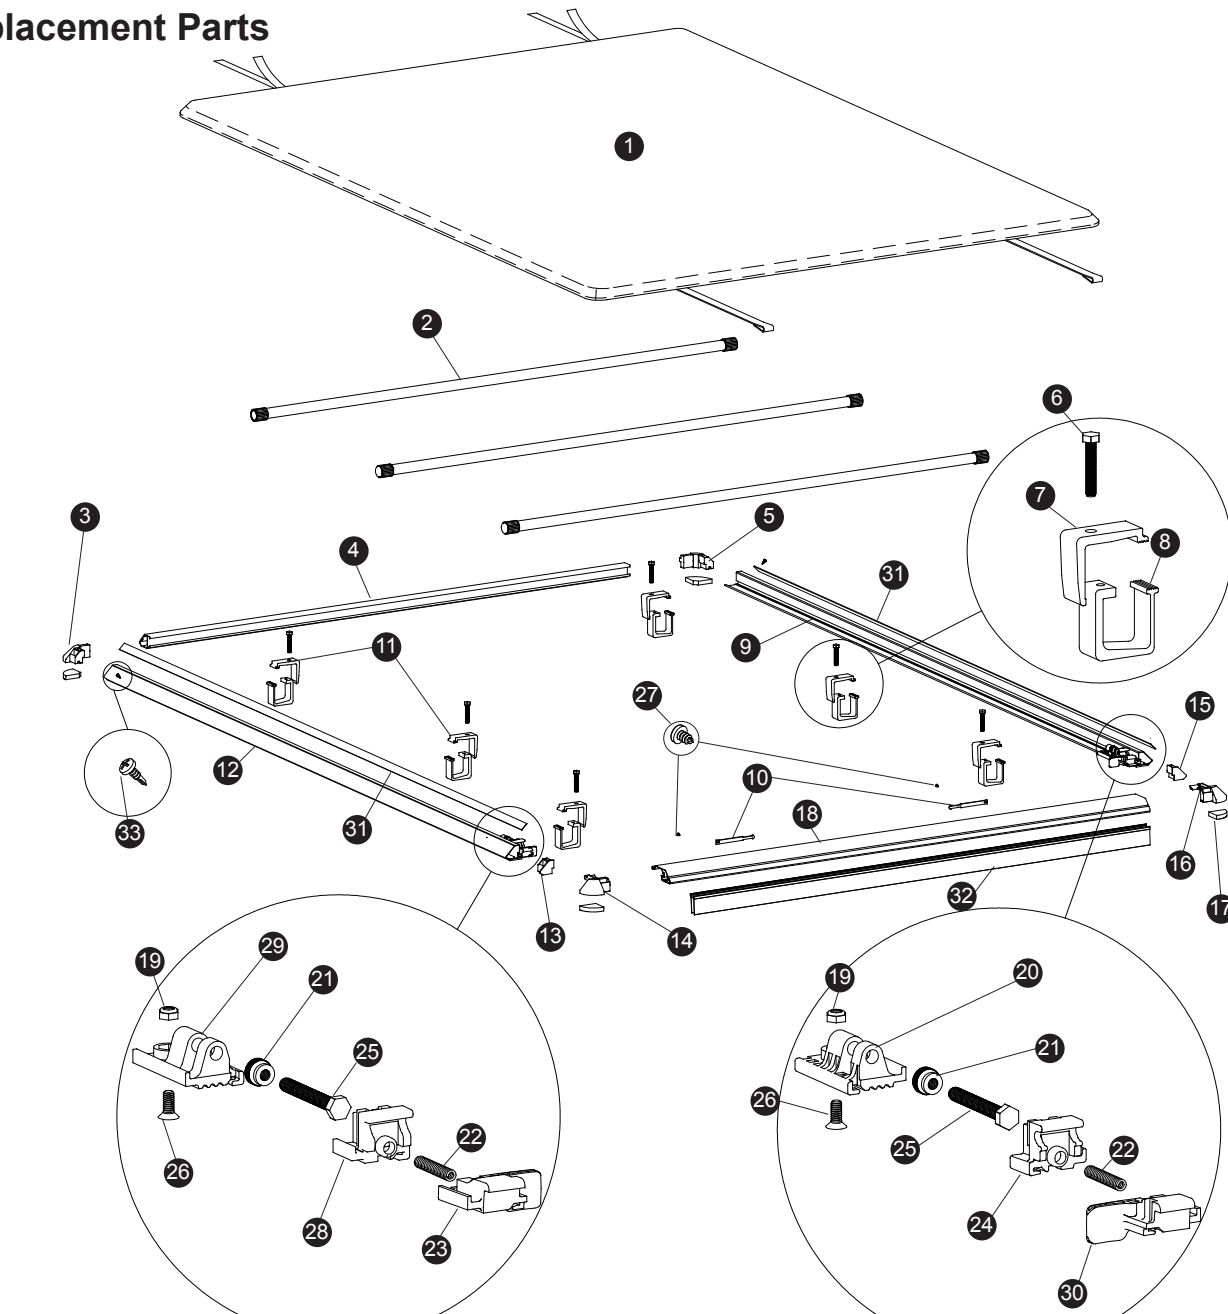

1	*	Truxport® Cover
2	*	Bow
3	1703558	Corner Plug
4	*	Cab End Header
5	1703557	Corner Plug
6	1703548	Cap Screw, 5/16" x 1 3/4"
7	1703530	Male Clamp
8	1703531	Female Clamp
9	*	Passenger's Side Rail
10	1116028	Safety Clips
11	1703561	Clamp Assembly
12	*	Driver's Side Rail
13	1703569	End Plug
14	1703967	Corner Plug - Driver's Side
15	1703570	End Plug
16	1703968	Corner Plug - Passenger's Side
17	1703568	Weather Seal

18	*	Tailgate Header
19	1200765	Nylon Lock Jam Nut, 5/16"
20	1703556	Tension Adjustment Base, Pass. Side
21	1703537	Thumb Nut, 5/16"
22	1703559	Compression Spring
23	1703554	Push Lock, Driver's Side
24	1703725	Header Stop Latch, Passenger's Side
25	1703539	Cap Screw, 5/16" x 2 1/2"
26	1703560	Flat Head Cap Screw, 1/4" x 5/8"
27	1703973	Self-Drilling Screw, #6 x 1/4"
28	1703552	Header Stop Latch, Driver's Side
29	1703555	Tension Adjustment Base, Driver's Side
30	1703724	Push Lock, Passenger's Side
31	*	Hook Fastener
32	*	Rear Header Seal
33	1703690	Self-Drilling Screw, #6 X 3/8"

\* Please specify length or make and model of vehicle.

## TruXedo, Inc.

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078

Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304

Visit Us Online: <http://www.truxedo.com>

**TRUXPORT**  
Another Fine Tonneau Cover by TruXedo

P/N 1116032 Rev U



# FIVE YEAR WARRANTY

TruXedo, Inc. warrants that all new, unused products are free from defects in material and workmanship. This Five Year Limited Warranty is effective if the product is properly installed and used for the purpose intended. It applies to the original buyer only. TruXedo's obligation under this Warranty is limited to repairing, or at its option, replacing any part that is returned, transportation prepaid, to TruXedo, Inc., Yankton, South Dakota, if the product is, in our judgment, defective. All materials must be accompanied by an RMA (Returned Material Authorization) number requested by and authorized in advance of returning the materials. TruXedo, Inc. shall not be liable or responsible to supply or pay labor to replace any part found defective, nor shall it be liable for any damages of any kind or nature to person, product, or property.

There are no Warranties for used products or products that have been repaired, altered, modified, subjected to misuse, negligence, accident or ordinary wear and tear.

TruXedo, Inc. products are sold without any express warranty except as set forth above. TruXedo, Inc. is not obligated to honor warranty claims if Genuine TruXedo, Inc. parts are not utilized.

DIRECT ALL WARRANTY CLAIMS TO TRUXEDO, INC. AT 1-877-878-9336



## WARNING

Tighten clamps securely on side rails before driving vehicle, to prevent cover from blowing off.

## SAFETY INSTRUCTIONS

1. Do not place objects on or against cover or framework.
2. Do not tie cargo to TruXport framework.
3. Never allow children or pets to occupy pickup box while cover is closed.
4. Cover is not airtight. Special care is required to keep cargo clean and dry.
5. Fabric cover won't prevent theft of contents inside truck box.
6. Cover must be rolled fully open and secured with safety straps when towing vehicle backwards.
7. Opened cover must be secured with both safety straps when driving vehicle.

## OWNER/USER RESPONSIBILITIES

It is the responsibility of the owner/user to read this manual and comply with the operating procedures. The owner/user is also responsible for inspecting their TruXport® cover, and for having parts repaired or replaced when worn or damaged.

Failure to follow safety instructions and warning labels could result in failure of your cover system and/or personal injury.

## MESSAGES TO INSTALLER

- Always wear safety glasses and/or other necessary protective equipment when installing your TruXport®.
- These instructions are complete for most pickup models. Additional instructions are included, if required for your pickup. Please read entire manual before installing your TruXport®.

## COVER MAINTENANCE

Vinyl cover can be hand washed with mild soap and water or cleaned in a car wash. Thoroughly rinse cover to remove any soap residue. Cover can be treated with any vinyl protectant made for tonneau covers.

**Never use silicon, petroleum, or citrus based products on your tonneau cover.**

### Questions?

Call our friendly customer service staff  
at TruXedo, Inc. Toll Free:

**1-877-878-9336**

Mon - Fri 8 am - 5 pm CT

Register online at [www.truxport.com](http://www.truxport.com) or mail this form  
to: TruXedo, P.O. Box 1078, Yankton, SD 57078-1078

Name: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone Number: \_\_\_\_\_

Email Address: \_\_\_\_\_

Date Purchased: \_\_\_\_\_

Product Purchased:

Price Paid: \_\_\_\_\_

☐ TruXedo Lo Pro QT

Dealer Name: \_\_\_\_\_

☐ TruXedo Deuce

Pickup Make: \_\_\_\_\_

☐ TruXport

Model: \_\_\_\_\_

☐ Original TruXedo

Year: \_\_\_\_\_

☐ TruXedoPlus

## TruXedo, Inc.

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078

Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304

Visit Us Online: <http://www.truxedo.com>



P/N 1116032 Rev U