


# TRUXEDO LO PRO QT® 2008 DODGE DAKOTA WITH TRACK SYSTEM INSTRUCTIONS



# TRUXEDO®

Lo-Pro QT  
Patented

PREMIUM SOFT ROLL-UP TONNEAU COVER

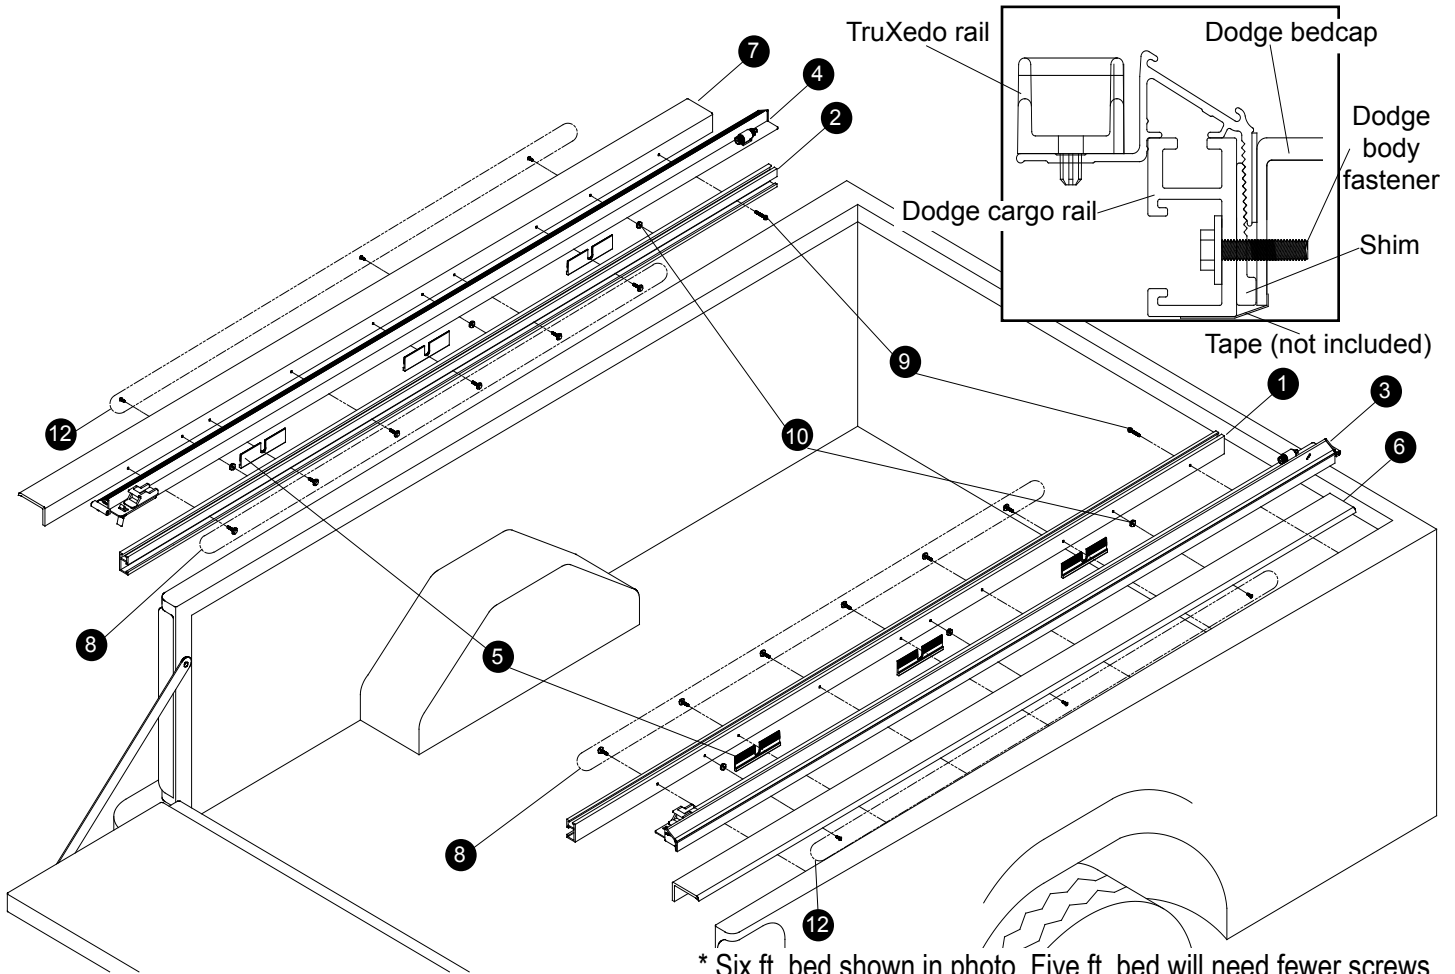

\* Six ft. bed shown in photo, Five ft. bed will need fewer screws.

## TRUXEDO® LO PRO QT 2008 DODGE DAKOTA WITH TRACK SYSTEM REPLACEMENT PARTS

1	*	Dodge Cargo Rail, Passenger's Side	5	1704096	Shim	9	1704229	Hex Flange Head Bolt
2	*	Dodge Cargo Rail, Driver's Side	6	*	Dodge Stock Bed cap, Passenger's Side	10	1704231	Nylon Spacer
3	*	TruXedo® Side Rail, Passenger's Side	7	*	Dodge Stock Bed cap, Driver's Side	11	1704230	Hex Screw
4	*	TruXedo® Side Rail, Driver's Side	8	*	Dodge Body Fastener			

## TruXedo, Inc.


P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078

Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304 Visit Us Online: <http://www.truxedo.com>

P/N 1117413

# TRUXEDO LO PRO QT® 2008 DODGE DAKOTA WITH TRACK SYSTEM INSTRUCTIONS

**STEP 1:** Remove cargo rail system from pickup bed by removing the black body bolts (Dodge body fasteners) from the rail using a 10mm socket. **Save these bolts.**

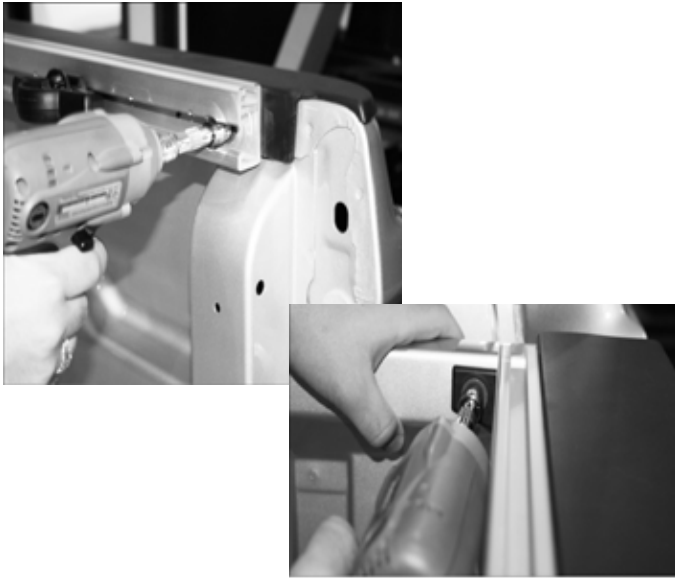


**STEP 2:** Remove the cargo rail and the bed caps together by pulling on the rails to release the body fasteners.





Cargo rails are held on by adhesive back tape and plastic fasteners.

**STEP 3:** Remove the star head screws that hold the bed cap to the cargo rail. Replace the star head screws with the included hex screws (1704230) along with one of the included nylon spacers (1704231). Partially thread the fastener into the cargo rail using a 1/8" allen wrench. **Do not fully tighten until a later step.**

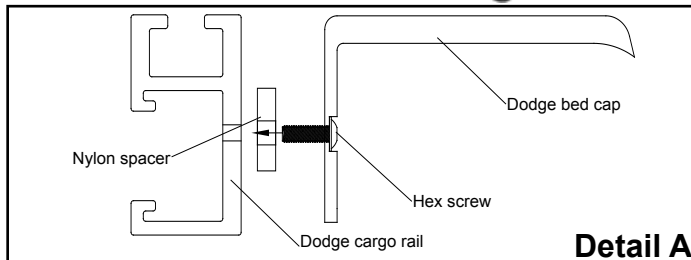

**STEP 4:** Insert three aluminium shims at the bolt attachments between the bed cap and the cargo rail. One shim at the front, middle, and rear of the rail system.

**Tip:** Secure the shims with tape to prevent them from sliding out during installation. Make sure the tape can be removed after installation is complete.

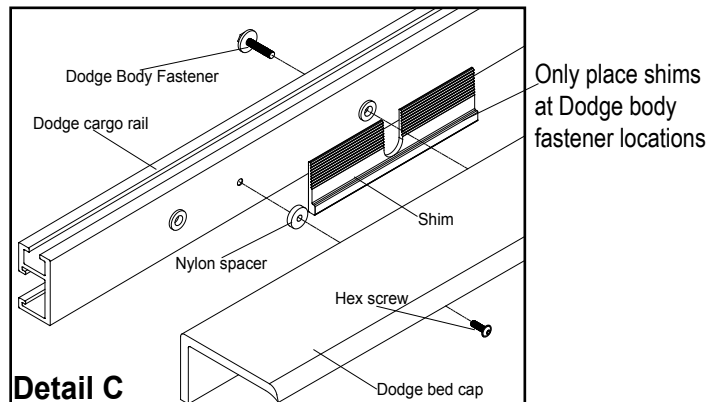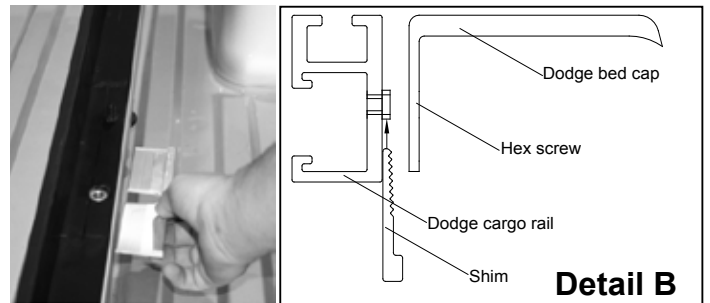

**TruXedo, Inc.**

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078


Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304 Visit Us Online: <http://www.truxedo.com>

**TRUXEDO**  
Lo-Pro QT  
PATENTED


P/N 1117413

# TRUXEDO LO PRO QT® 2008 DODGE DAKOTA WITH TRACK SYSTEM INSTRUCTIONS



**STEP 5:** Insert the TruXedo rail between the cargo rail and the bed cap. Now tighten the hex screws to help hold the TruXedo rail and the shims in place. \*Note: passenger side rail shown.

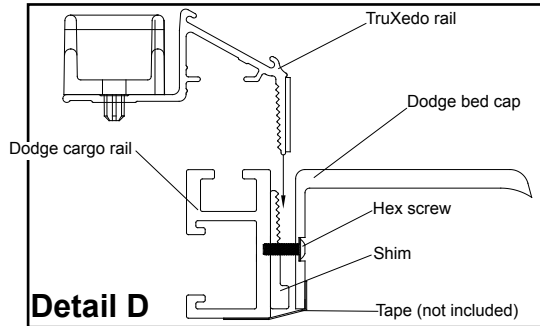

**STEP 6:** Make sure the TruXedo rail is positioned correctly between the bed cap and the cargo rail (See image below). The front of the TruXedo rail should be flush with the cargo rail.

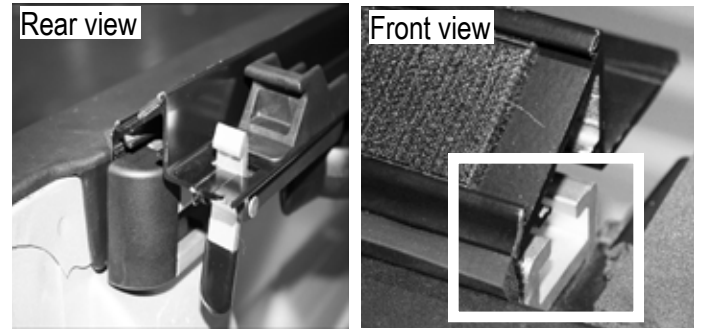


**STEP 7:** Re-install the rail system using the black body bolts (Dodge body fasteners) that held the cargo rail system except for the bolt farthest to the front, replace this bolt with supplied hex flange head bolt (1704229) using the same 10 mm socket.

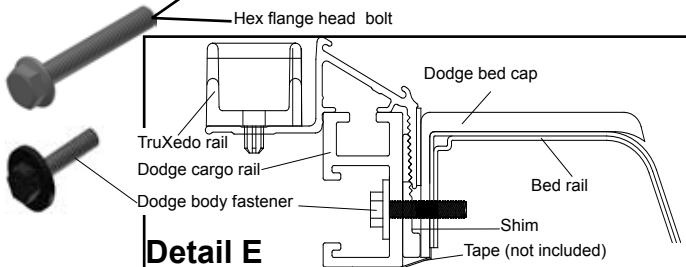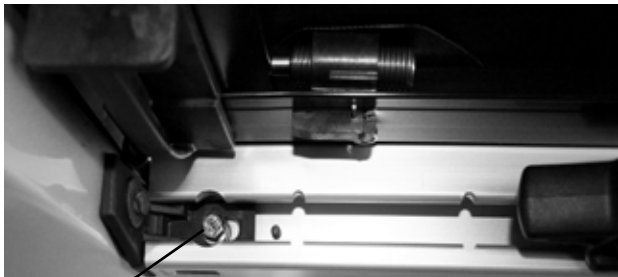


**STEP 8:** Remove the tape from the bottom of the rail system.

**STEP 9:** Apply the rubber seals to the front and back of each rail as shown below by peeling off the red backing on the rubber seal and sticking the seal to the rail.

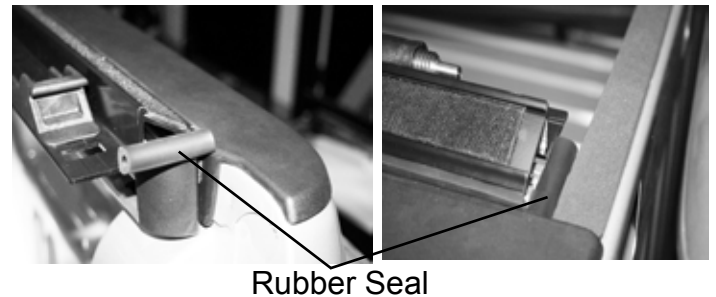


**STEP 10:** Apply the bulkhead seal to the front of the pickup box.

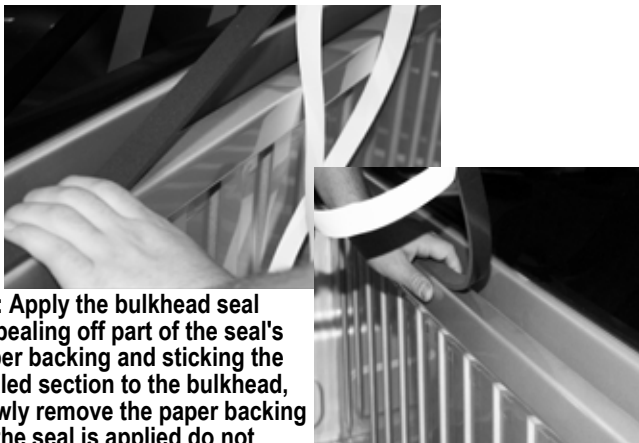

**Tip:** Apply the bulkhead seal by peeling off part of the seal's paper backing and sticking the pealed section to the bulkhead, slowly remove the paper backing as the seal is applied do not remove the paper backing all at once.

**STEP 11:** See owners manual for cover installation.

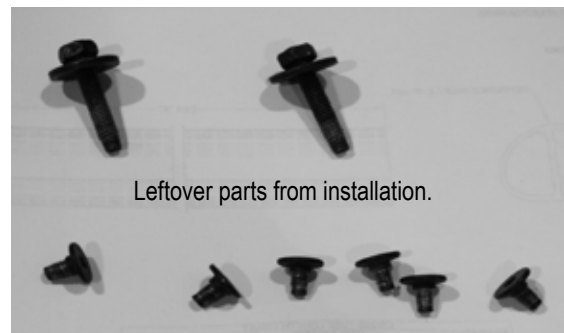

**TruXedo, Inc.**

P.O. Box 1078, 2209 Kellen Gross Dr., Yankton, South Dakota 57078  
Call Toll Free: 1-877-TRUXEDO (1-877-878-9336) Fax: (605) 664-9304 Visit Us Online: <http://www.truxedo.com>

**TRUXEDO**  
Lo-Pro-Qt  
Patented  
P/N 1117413