



PERFORMANCE INTAKE KITS

INSTALLATION INSTRUCTIONS

77-9030

TOYOTA


2007-08 FJ CRUISER

V6-4.0L

NOTE: This kit was not designed to fit vehicles with a body lift.

TOOLS NEEDED:

Flat Blade Screwdriver
Phillips Screwdriver
Ratchet
Extension
10mm Socket
12mm Socket
13mm Socket
Pliers
2.5mm Allen Wrench
10mm Wrench
13mm Wrench

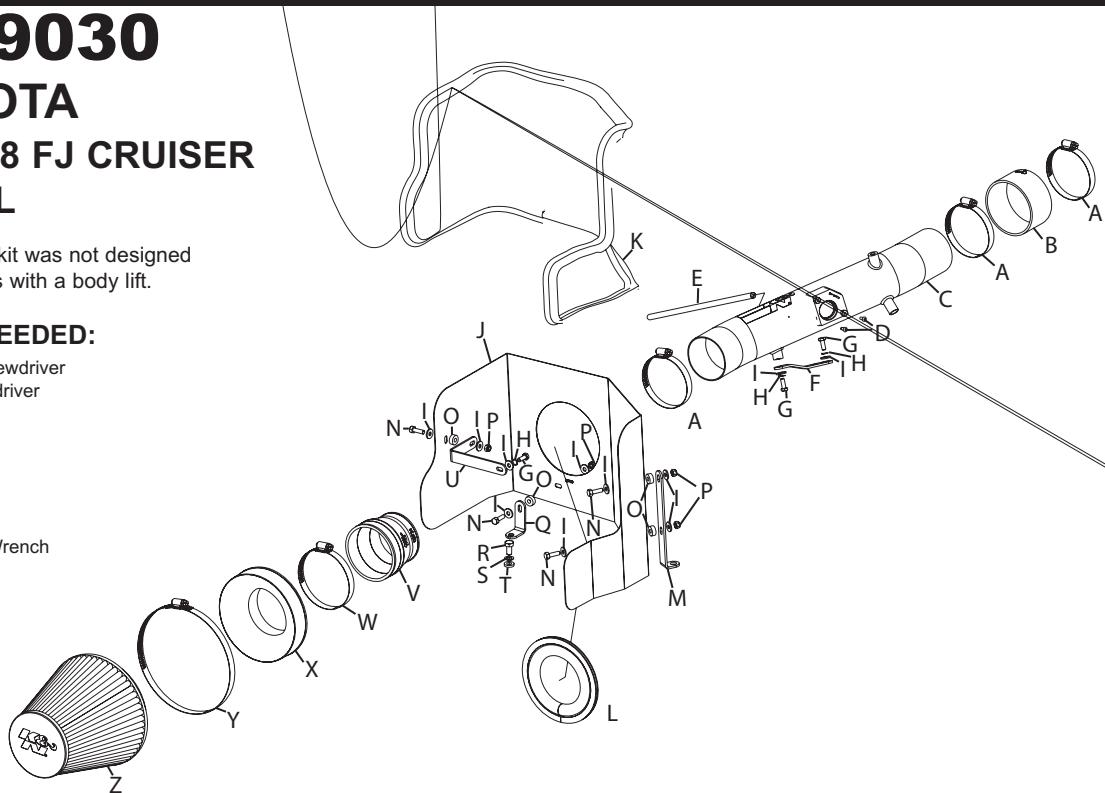


Parts List

Desc.	Qty.	Part #
A HOSE CLAMP #48	3	08601
B HOSE; 3"ID X 2'L, BLACK SILICONE	1	08622
C INTAKE TUBE	1	27187
D SCREW; M4-.7 X 12, BUTTON HEAD SS	2	07726
E HOSE; 18" 4MM	1	08153
F BRACKET; "Z"	1	26545
G BOLT; 6MM-1.00 X 16MM, SS	3	07812
H WASHER; 1/4" LOCK, ZN	3	08198
I WASHER; 1/4"ID X 5/8"OD - SAE	11	08275
J HEAT SHIELD	1	07638
K EDGE TRIM (83")	1	102503
L EDGE TRIM (17")	1	102469
M BRACKET; LG."L", MILD STL, FB/PC	1	07159
N BOLT; M6 X 1.00" X 20MM HEX, SS	4	07795
O SPACER: .625" OD X .250"ID X .250)L,	4	06555
P NUT; 6MM NYLOCK, HEXHEAD	4	07553
Q BRACKET; L-BEND, FIN	1	070812
R BOLT; 8MM-1.25 X 16MM, HEXHEAD	1	07844
S WASHER; 8MM SPRING (WAVE)	1	08239
T WASHER; 5/16"ID X 5/8"OD, FLAT	1	08276
U BRACKET; LG "L", MILD STL, FB/PC	1	26637
V HOSE; 3.5"ID TO 3"ID TPRD, SILICONE	1	08724
W HOSE CLAMP #56	1	08620
X ADAPTER; #380	1	21512
Y HOSE CLAMP #104	1	08697
Z AIR FILTER	1	RF-1048


NOTE: FAILURE TO FOLLOW INSTALLATION INSTRUCTIONS AND NOT USING THE PROVIDED HARDWARE MAY DAMAGE THE INTAKE TUBE, THROTTLE BODY AND ENGINE.

TO START:

- Turn the ignition OFF and disconnect the vehicle's negative battery cable.

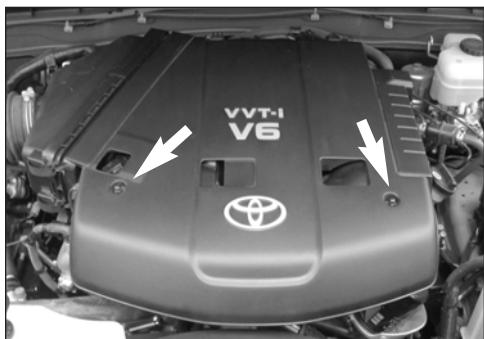


- Loosen the two nuts that secure the engine cover.

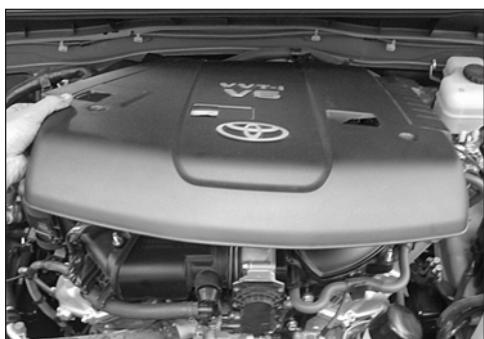


- Lift up and remove the engine cover.



- Disconnect the mass air sensor electrical connection.

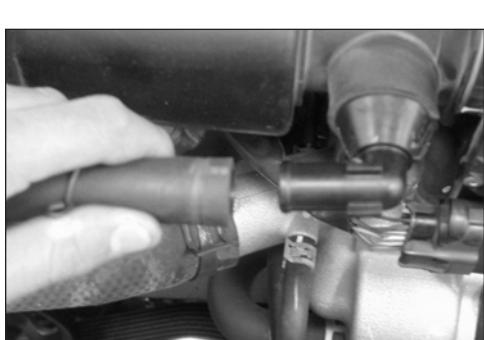


- Slide the spring clamp back and then disconnect the crank case ventilation hose from the fitting on the factory air box.

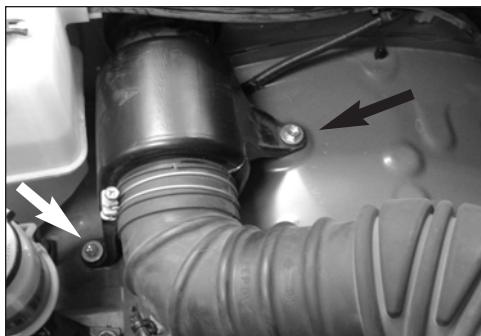

- Remove the two intake resonator mounting bolts shown.



- Loosen the hose clamp which secures the intake tube to the stock air filter housing and then remove the intake tube and resonator assembly.

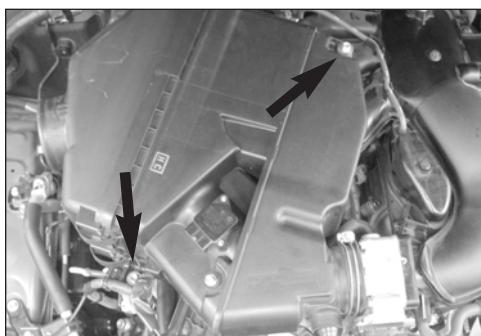


- Remove the two air box mounting bolts shown and loosen the hose clamp at the throttle body.



- Lift up and remove the air box assembly from the engine.

NOTE: Be sure to unhook the mass air sensor wiring harness retaining clips and fuel pressure regulator vent hose from the air box.

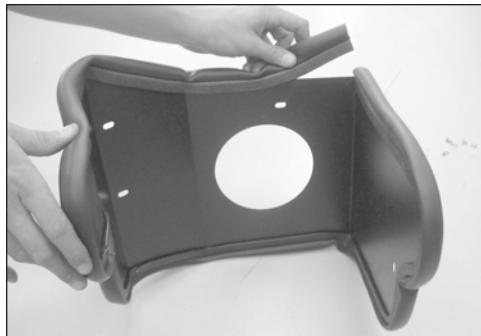

- Install the long edge trim around the perimeter of the heat shield as shown.

NOTE: Some trimming of the edge trim may be necessary



- Install the short edge trim to the inside of the intake tube pass trough hole as shown.

NOTE: some trimming of the edge trim may be necessary



12. Install the mounting bracket (07159) onto the heat shield using the provided spacers as shown.



13. Remove the power steering reservoir mounting bolt shown.

NOTE: This bolt will be reused.



14. Install the heat shield into the vehicle and secure to the power steering reservoir with the bolt removed in step #13.



15. Secure the heat shield to the inner fender with the large "L" bracket as shown.

NOTE: Be sure to use the supplied spacer between the bracket and heat shield.



16. Secure the bottom of the heat shield to the inner fender with the small "L" bracket.

NOTE: Be sure to use the provided spacer between the bracket and heat shield.




17. Remove the two screws that secure the mass air sensor to the air box and then remove the mass air sensor from the air box.




18. Install the mass air sensor into the K&N intake tube using the provided hardware.



19. Remove the engine cover mounting stud from the factory air box.

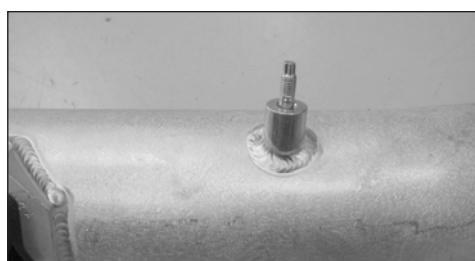

20. Install the engine cover mounting stud into the K&N intake tube as shown.

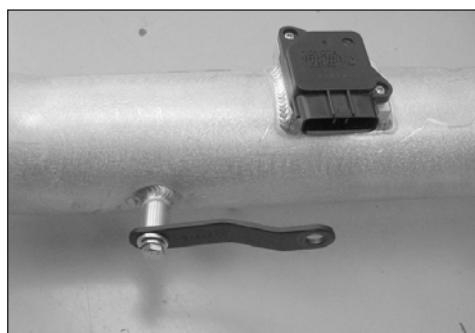

21. Install the tube mounting bracket (26545) onto the K&N intake tube as shown.

NOTE: Do not completely tighten at this time.




22. Install the supplied silicone hose (08622) onto the throttle body and secure with the provided hose clamp.



23. Install the intake tube into the silicone hose at the throttle body and align the mounting bracket with the threaded boss on the valve cover, then secure with the provided hardware and hose clamp.



24. Install the provided filter adapter into the K&N filter as shown and secure with the provided hose clamp.

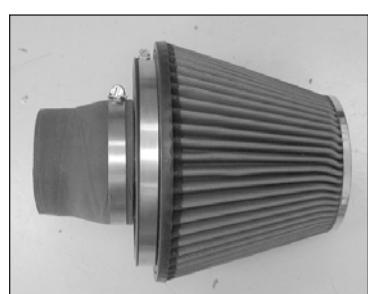

25. Install the provided silicone hose (08724) onto the K&N filter assembly and secure with the provided hose clamp.



26. Install the K&N filter assembly onto the K&N intake tube and secure with the provided hose clamp.




27. Connect the crank case vent hose to the K&N intake tube and secure with the stock hose clamp.




28. Install the provided vent hose onto the fuel pressure regulator and then onto the K&N intake tube as shown.



29. Reconnect the mass air sensor electrical connection.

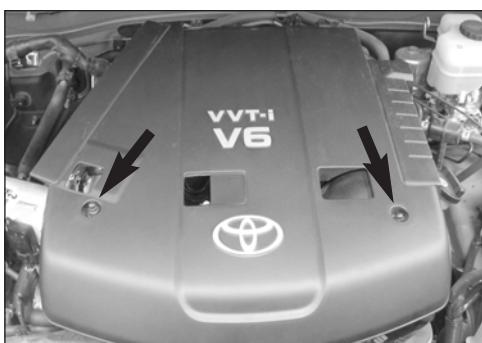

30. Reinstall the engine cover and secure with the factory mounting nuts.

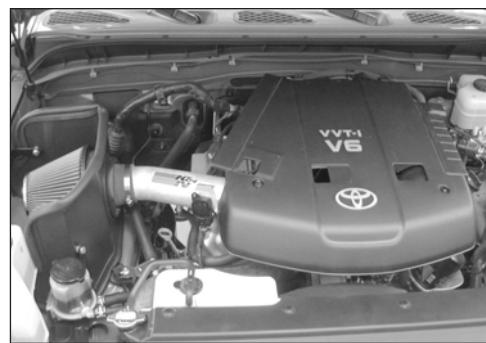

31. Reconnect the negative battery cable. Double check to make sure that everything is tight and properly positioned before starting the vehicle.

32. It will be necessary for all Performance Intake Kits to be checked periodically for realignment, clearance and tightening of all connections. Failure to follow the above instructions or proper maintenance may void warranty.

ROAD TESTING:

1. Start the engine with the transmission in neutral or park, and the parking brake engaged. Listen for air leaks or odd noises. For air leaks secure hoses and connections. For odd noises, find cause and repair before proceeding. This kit will function identically to the factory system except for being louder and much more responsive.
2. Test drive the vehicle. Listen for odd noises or rattles and fix as necessary.
3. If road test is fine, you can now enjoy the added power and performance from your kit.
4. K&N suggests checking the Air filter element periodically for excessive dirt build-up. When the element becomes covered in dirt (or once a year), service it according to the instructions on the Recharger service kit, part number 99-5000 or 99-5050.