




Installation Instructions for KC 74371 2-Tab Front Light Bar Chevy 1500 2007-10

Thanks for choosing a KC HiLiTES product. We take pride in building the highest quality, best engineered systems possible. Your satisfaction with our product is important, so if you have any questions, please call our customer service line at 800-528-0950.

Parts Included:

- 1 - Light Bar
- 2 - Brackets
- 4 - 3/8" x 1" black bolts
- 4 - 3/8" washers
- 4 - 3/8" lock nuts

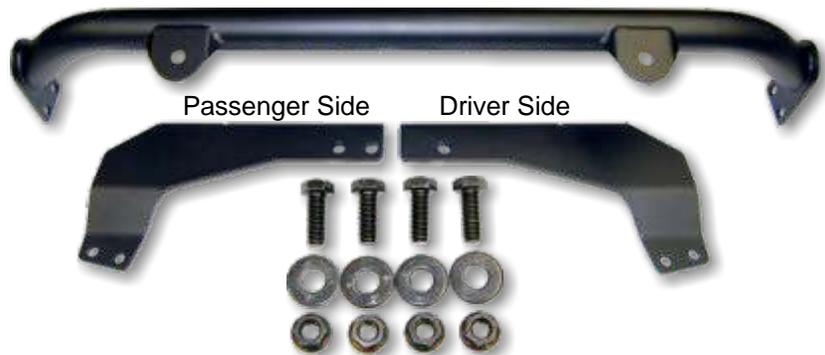

Installing the Bar

NOTE - Your new light bar will use the factory OE tow hook bolts while retaining the factory tow hooks.

1. Remove the front and rear bolts from the passenger side tow hook.
2. Remove the front bolt only from the driver side tow hook
3. Locate the driver side bracket (has one hole) and the passenger side bracket (has two holes). Slide each of the respective light bar brackets through the outside of the tow hook opening of the valance panel. Align the holes in the light bar brackets with the tow hook holes and insert the forward bolt on both the driver and passenger side. Start the nuts and hand tighten.
4. Insert the rear bolt in the passenger side tow hook and hand tighten nut.
5. Hold the light bar bracket up against the bottom of the frame on the driver and passenger side, then tighten all hardware.
6. Place the light bar between the two brackets, align the holes and push all four bolts through the bracket then the bar. Add the flat washers and loosely install the nuts.
7. Align the bar ensuring the light tabs are level, then tighten all hardware.

You're DONE! - - - - - Install your KC lights and enjoy.



IF YOU HAVE ANY PROBLEMS
OR QUESTIONS, PLEASE CALL
CUSTOMER SERVICE AT 800-528-0950