

Part No. J005

Fits: Jeep Wrangler JK 4DR. 2007-2012

PARTS LIST:			
Qty	Part Description	Qty	Part Description
1	Passenger Side Rocker Guard	16	3/8" x 1" Self Tapping Bolts
1	Driver Side Rocker Guard		

TOLL FREE SUPPORT: 866 638 4870

Install Time : 60 – 180 Minutes

(Professional Installation)

Install Note : Drilling Requested


REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT

READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION

INSTALLATION PROCEDURE

- 1. Locate the mounting location on the frame of the vehicle by the front and rear body mount (Figure 1).
- 2. With assistance position the passenger side Rocker Guard onto vehicle's frame. Align Rocker Guard to the vehicle, and then use the front and rear mounting brackets as a template to mark the drilling locations (Figure 2 & 3).
- 3. Remove Rocker Guard and set aside on clean working area.
- **4.** Carefully drill a 9/32" hole on each marked locations. **CAUTION:** Be careful not to damage the vehicle when drilling. Holes can not be bigger than 9/32" or bolts won't tighten.
- **5.** With assistance re-position passenger side Rocker Guard onto frame and attach it using the included (8) 3/8" x 1" Self Taping Bolts. Do not tighten at this time.
- **6.** Level and adjust Rocker Guard then tighten all hardware at this time.
- **7.** Repeat steps 2-7 for driver side.
- 8. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

Page **1** of **2** Rev 010112

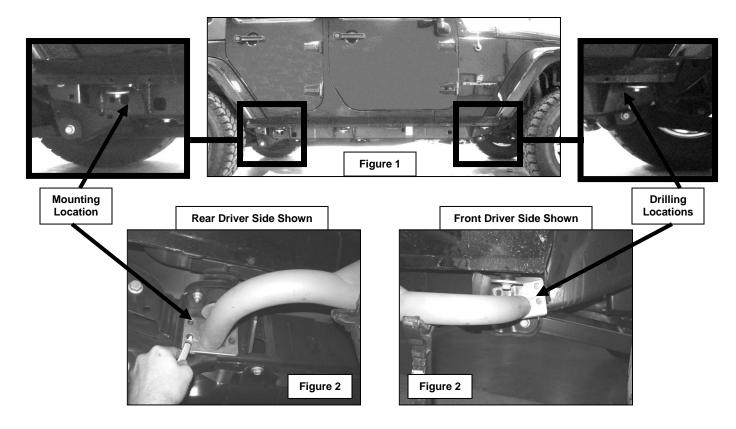

Do periodic inspections to the installation to make sure that all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Sidebar.

For gloss black finishes: Mild soap may be used to clean the Products.

Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.

Page **2** of **2** Rev 010112