

**SUPERLIFT SUSPENSION SYSTEMS**

300 Huey Lenard Loop Rd.
West Monroe, Louisiana 71292-9421
Phone: (318) 322-3458
Sales / Tech: 1-800-551-4955
FAX: (318) 323-5995
Web Site: www.superlift.com

2" Lift System for 1999 and newer Ford F-250 / 350 Super Duty 4WD Pickup

INSTALLATION INSTRUCTIONS

INTRODUCTION

Installation requires a professional mechanic. Prior to beginning, check all suspension-to-frame attaching points for stress cracks. The overall vehicle must be in excellent working condition; repair or replace all worn parts.

Read instructions several times before starting. Be sure you have all needed parts and know where they install. Read each step completely as you go.

NOTES:

- The rear lift is sold separately and includes separate installation instructions.
- Save all factory mounting hardware for reuse, unless otherwise noted.
- A factory service manual must be on hand. The manual will contain fastener torque specifications, assembly techniques, and / or special tool requirements that are unique to this particular year and model vehicle.
- Do not add or fabricate any components to gain additional suspension height.
- Prior to attaching components, be sure all surfaces are free of grit, grease, undercoating, etc.
- A torque specification in foot-pounds is shown in parenthesis "()" after each fastener.
- Use the check off box "" found at each step to help you keep your place. Two "" denotes that one box is for the driver side and one is for the passenger side.



You Wanna Be A Star?



Would you like to see your vehicle in national advertising publications? Superlift and many of their dealers are constantly looking for vehicle shots (both still and action) to update their ads, catalogs and photo libraries. Browse through our catalog and pay attention to the vehicle angles, lighting and backgrounds. Keep in mind that we can't use photos of trucks that show modified kits, improperly installed kits or kits with competitor's components visible.

We need the prints and negatives, your name, address, phone number along with a brief description of your vehicle (year, lift height, tire & wheel size, extra goodies) and signed permission to use the photo(s). Send to:



Superlift Suspension Systems
Attn: Advertising Department
211 Horn Lane
West Monroe, LA 71292



PARTS LIST ... The part number is stamped into each part or printed on an adhesive label. Identify each part and place the appropriate mounting hardware with it.

PART NO	DESCRIPTION (Qty.- if more than one)	NEW ATTACHING HARDWARE (Qty.- if more than one)
----------------	--	---

55-01-9620.....front spring hanger, driver side

55-02-9620.....front spring hanger, passenger side

55-03-9620.....(2) front spring shackle

55-04-9620.....	front track bar bracket.....	(1) 5/8" x 3-1/2" bolt
	models made on or before 2-28-99	(1) 5/8" nyloc nut

OR

55-04-9622	front track bar bracket	models made on or after 3-1-99
------------	-------------------------	---------------------------------------

55-05-9620.....(2) compression travel..... (4) 7/16" x 1" bolt
stop extension bracket (4) 7/16" Nyloc nut

04-154.....(2) shackle sleeve..... (2) 7/16" x 5" bolt
(2) 7/16" Nyloc nut

55-07-9620.....(2) bumper spacer (4) 12mm x 60mm bolt
(4) 7/16", extra thick flatwasher

85144(2) shock absorber, front (2) shock boot, tie, decal
(2) hardware pack

85158(2) shock absorber, rear (2) shock boot, tie, decal
(2) hardware pack

0034Superlift badge alcohol wipe pad

00461decal, "Warning To Driver"

00421decal, 2" x 5" yellow Superlift

INSTALLATION PROCEDURES

1) PREPARE VEHICLE...

- Place vehicle in neutral. Raise front of vehicle and secure a jack stand beneath each frame rail, behind the front spring shackles. Ease the frame down onto the jack stands. Leave the jack under the axle to support it while the suspension is disassembled. Place transmission in low gear or "park", and chock rear tires. Remove front tires.

2) REMOVE FRONT BUMPER...

- Using a clip tool or a large flat head screwdriver, disconnect the rubber splash panel from beneath the front bumper. Disconnect the block heater plug "Christmas tree" clip from the bumper (if so equipped).
- Remove the four bumper-to-frame bolts and lay the bumper aside.

3) CONTINUE DISASSEMBLY...

- The track bar's lower end attaches to the passenger side of the front axle. It's upper end mounts to a bracket that ties into the passenger side frame rail and the primary frame crossmember. Disconnect the track bar from it's upper mounting bracket and let the bar hang. Now unbolt the bar's upper end mounting bracket.
- Remove the factory shock absorbers.
- On each side, a rubber compression travel stop is bolted to the bottom of the frame rail, just inboard of the shock absorbers. Remove the stops.

4) SUPERLIFT SPRING HANGER:

**#55-01-9620 for driver side,
#55-02-9620 for passenger side...**

Leaf spring bracketry removal and installation (Steps 4 and 5) is performed one side at a time. Start on the driver side.

- Position the floor jack under the driver side of the front axle knuckle. Load the jack so that it supports, not raises, the axle; the frame rail is to remain securely on the jack stand.
- Unbolt the spring's front eye from it's hanger, then lower the jack to separate the spring eye from the hanger.
- Unbolt the factory spring hanger and install the Superlift hanger in its place, using the factory fasteners (76). The "01" installs on the driver side; the "02" installs on the passenger side.
- Raise the jack and position the spring eye in the Superlift hanger. Install the factory bolt from the inside. Install the factory retaining nut and hand tighten only. The bolt is fully tightened in a later step when the suspension is supporting vehicle weight.

**5) SUPERLIFT SPRING SHACKLE #55-03-9620,
SHACKLE SLEEVE #04-154...**

- Remove the spring eye-to-shackle bolt and separate the two by lowering the jack. Remove the shackle-to-frame bolt and discard the factory shackle.
- Attach the Superlift shackle to the spring eye using the factory fastener. Insert the bolt from the inside; hand tighten only. The end of the shackle that has one side "boxed" is the bottom end. The boxed side faces towards rear of vehicle.
- Raise jack and attach the top of the shackle to the frame. Use the factory bolt, inserted from the inside; hand tighten only.
- Insert the spacer sleeve between shackle legs and insert the furnished 7/16" x 5" bolt. Insert bolt from the inside; install the supplied 7/16" Nyloc nut and hand tighten only.
- Repeat steps 4 and 5 on the passenger side.

6) DRILLING THE TRACK BAR...

NOTE: THIS STEP IS ONLY PERFORMED ON MODELS MADE ON OR BEFORE 2-28-99. IF THE VEHICLE WAS MADE ON OR AFTER 3-1-99, PROCEED TO STEP 7.

- Note the upper and lower ends of the track bar (it must be installed in the same position it was removed). Unbolt the track bar from its lower mounting point on the axle.
- Place the track bar in a vise or other suitable fixture.
- Using a 5/8" bit, drill out the center of the sleeve pressed into the upper end of the track bar. Take precautions to ensure the bit doesn't bind in the sleeve and clean up any burrs with a hand file.
- Reinstall the lower end of the track bar on the axle using the factory fastener and tighten to factory specifications.

NOTE: While the factory hardware and sleeve will fit the Superlift bracket, failure to perform step 6 will result in an intermittent "popping" noise, especially while turning, due to excessive clearance between the factory bolt and sleeve.

7) TRACK BAR BRACKET #55-04-9620 OR #55-04-9622...

- Install the new Superlift "04" track bar bracket into the original bracket location. Reuse the factory fasteners (130).
- If using #55-04-9620 (vehicles made on or prior to 2/28/99), attach the upper end of the track bar to the "04" bracket using the supplied 5/8" x 3-1/2" bolt and 5/8" nyloc nut. Insert the bolt from front to rear. Hand tighten only; the bolt is fully tightened in a later step.
- If using #55-04-9622 (vehicles made on or after 3/1/99), attach the upper end of the track bar to the "04" bracket using the factory bolt. Insert the bolt from front to rear. Hand tighten only; the bolt will be fully tightened in a later step.

8) SUPERLIFT FRONT SHOCK ABSORBERS #85144...

- Install the shock bushings, boot, and decal.
- Install the shock. Tighten the upper nut (76) and lower bolt (76).

9) COMPRESSION TRAVEL STOP EXTENSIONS #55-05-9620...

- On each side, attach the original rubber compression travel stop to a "05" extension bracket using two 7/16" x 1" bolts and Nyloc nuts (37). Bolt this assembly to the bottom of the frame rail at the stop's original position. Use factory hardware (67).

10) WHEELS / TIRES...

WARNING: When a wheel is installed, always check for and remove any corrosion, dirt or foreign material on the mounting surfaces of the wheel, or the drum / rotor surfaces that contact the wheel. Installing wheels without proper metal-to-metal contact at the wheel mounting surfaces can cause the lug nuts to loosen and the wheel to come off while the vehicle is in motion.

NOTE: Inspect the lug nut and washer assemblies. Replace the assembly if the washer portion will not spin freely.

- Position wheel / tire onto vehicle. Turn the wheel until one lug is at the top of the wheel hub bolt circle.
- Install the lug nuts loosely. Use the lug nut tightening pattern shown in [DIAGRAM 1] to tighten the remaining lug nuts to minimize runout. Tighten the lug nuts only until snug. The lug nuts are fully tightened in a later step.

11) FRONT BUMPER SPACERS #55-07-9620...

- Position bumper spacers between bumper and frame. Place a 7/16", extra thick flat washer on each new 12mm bolt prior to installation (51 to 68).

- Reattach the rubber splash panel. Insert the block heater wiring loom "Christmas tree" plug.

12) INITIAL CLEARANCE CHECK...

- With the vehicle still on jack stands, lower the jack(s) so the suspension is "hanging" at full extension travel. Cycle the steering lock-to-lock and check all components for proper operation and clearances.

13) TORQUE SPECIFICATIONS and FINAL CLEARANCE CHECK...

- Raise vehicle and remove jack stands. Lower the vehicle to the ground so that the suspension is supporting the weight of the vehicle. Torque the following:
 - 1) front leaf springs, rear (shackle) eye (185)
 - 2) front leaf springs, front eye (259)
 - 3) track bar eye bolt, upper end (129)
 - 4) [DIAGRAM 1] wheel lug nuts (148)


CAUTION: Failure to tighten the lug nuts in the sequence shown can result in high tire and wheel runout, which speeds up the development of brake roughness, shudder and vibration.

WARNING: Retighten lugs at 500 miles after any wheel change, or anytime the lug nuts are loosened. Failure to do so could cause wheels to come off while vehicle is in motion.

- Again cycle the steering lock-to-lock and inspect the tires / wheels, and the steering, suspension and brake systems for proper operation, tightness and adequate clearances.

14) REAR LIFT...

Superlift's rear block lift includes it's own generic installation instructions. To eliminate any possible confusion, we are verifying here that the Superlift lift blocks seat against the axle,

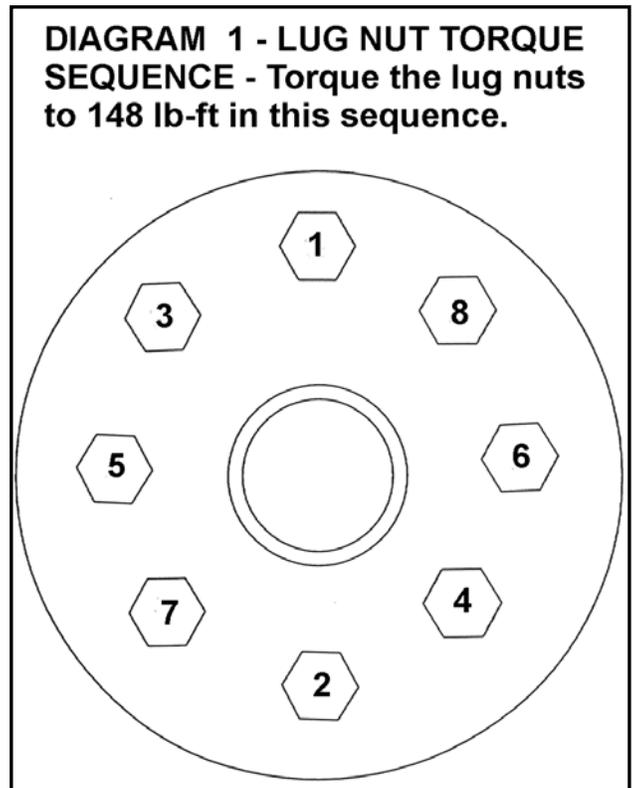

and the factory spacers are placed on top of the Superlift blocks. Torque specification for the Superlift 5/8" diameter U-bolts and Nyloc nuts is (185).

15) SUPERLIFT REAR SHOCK ABSORBERS #85158...

- Remove the factory shock absorber.
- The lower end of the shock is attached to a bracket, which in turn, attaches to the axle tube via a U-bolt. To shorten the required shock length, loosen the U-bolt and rotate the shock attachment point up. There is a bracket locating button on the axle tube; the bracket / U-bolt assembly will rotate up until the U-bolt makes contact with the button. Evenly tighten the U-bolt nuts: Ford axle (35), Dana axle (46).
- Install the shock bushings, boot and decal. Install the shock. Tighten both shock eye mounts (46).

16) HEADLIGHTS...

- Readjust headlights to proper setting.

17) SUPERLIFT NAME BADGE and WARNING DECAL...

The system includes one 2" x 5" name badge (#0034). Additional and / or larger badges are available from Superlift or a Superlift dealer. We suggest putting the badges on the front fenders, tailgate, or rear window. The badge mounts by means of factory applied, double-backed tape. Follow these instructions to ensure that badge sticks properly:

- Clean designated area with warm, soapy water. Rinse and wipe dry with a soft, lint free towel.
- Thoroughly prep the area with the furnished alcohol wipe pad and wipe dry with a soft, lint free towel. Do not touch the surface again with your hands; they transfer body oils.
- Remove mounting tape backing, line up badge, and press in place. Do not touch mounting tape or allow tape to get dirty.
- Press firmly on the badge face and hold a few seconds to seat mounting tape.
- A superior adhesive bond forms over time. We recommend allowing 24 hours of cure time before washing and waxing. The emblem itself can be cleaned with any glass cleaner.
- Install the "WARNING TO DRIVER" decal on the inside of the windshield, or on the dash, within driver's view. Refer to the "NOTICE TO DEALER AND VEHICLE OWNER" section below.

IMPORTANT PRODUCT USE INFORMATION

As a general rule, the taller a vehicle is, the easier it will roll over. Offset, as much as possible, what is lost in roll over resistance by increasing tire track width. In other words, go "wide" as you go "tall". Many sportsmen remove their mud tires after winter / hunting season and install ones more appropriate for street driving; always use as wide a tire and wheel combination as possible to enhance vehicle stability. We strongly recommend, because of roll over possibility, that the vehicle be equipped with a functional roll bar and cage system. Seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur.

Generally, braking performances and capabilities are decreased when significantly larger / heavier tires and wheels are used. Take this into consideration while driving.

Do not add, alter, or fabricate any factory or aftermarket parts to increase vehicle height over the intended height of the Superlift product purchased. Mixing component brands is not recommended.

Most states have some type of law limiting vehicle height. The amount of lift allowed, and how the lift may be achieved, varies greatly. Several states offer exemptions for farm or commercially registered vehicles. It is the owner's responsibility to check state and local laws to ensure that their vehicle will be in compliance.

Superlift makes no claims regarding lifting devices and excludes any and all implied claims. Superlift will not be responsible for any altered product or any improper installation or use of our products. We will be happy to answer any questions concerning the design, function, and correct use of our products.

IMPORTANT MAINTENANCE INFORMATION

It is the ultimate buyer's responsibility to have all bolts / nuts checked for tightness after the first 100 miles and then every 1000 miles. The steering, suspension and driveline systems, along with wheel alignment should be inspected by a qualified professional mechanic at least every 3000 miles.

NOTICE TO DEALER AND VEHICLE OWNER

Any vehicle equipped with a Superlift lifting device must have the enclosed "Warning to Driver" decal installed on the inside of the windshield or on the vehicle's dash, within driver's view. The "Warning to Driver" decal is to act as a constant safety reminder for whoever may be operating the vehicle. The WARRANTY IS VOID unless this decal is in place. **INSTALLING DEALER...** It is your responsibility to install warning decal and forward these installation instructions to the vehicle owner for review of warnings, product use and maintenance information. Replacement warning decals are available free upon request. These instructions are to be kept with the vehicle registration papers and owners manual for the service life of the vehicle.

SUPERLIFT LIMITED LIFETIME WARRANTY

Suspension products bearing the Superlift (LKI Ent.) name are warranted for as long as the original purchaser owns the vehicle that the LKI product was originally installed on. This warranty is non-transferable. Warranty covers only the product, no labor, time loss, or freight incurred. Any product that has been abused, altered, incorrectly installed, or used in competition is not covered. Product finish, spring bushings, Polyurethane products, and normal wear is not covered. The LKI product is subject to replacement or repair. No other warranties are expressed or implied. An authorized Superlift dealer must inspect the part in question and confirm that the "Warning to Driver" decal is properly displayed. A copy of the sales invoice is required for warranty consideration.