




Honda CBR600RR Undertail

(2005-06, Available in: Red, Black, 05 Silver, 06 Silver, Orange)


HOTBODIES RACING RECOMMENDS THAT YOU HAVE A PROFESSIONAL MECHANIC PERFORM THIS INSTALLATION. IF YOU CHOOSE TO "DO-IT-YOURSELF" ALWAYS TAKE APPROPRIATE SAFETY MEASURES WHEN INSTALLING THIS PRODUCT AND USE SAFETY GOGGLES AND LEATHER GLOVES. CAREFULLY READ ALL INSTRUCTIONS BEFORE BEGINNING THE INSTALLATION PROCESS! HOTBODIES RACING WILL NOT REPLACE YOUR STOCK GLOVE-BOX FOR ANY REASON, MEASURE TWICE AND CUT ONCE!

1) Carefully remove the tail section body work from the bike. Disconnect the brake light wires, license plate and turn signals, then remove the stock mud flap. The stock aluminum heat shield under the tail section also needs to be removed, to remove stock heat shielding loosen or remove exhaust mounting brackets and slide the heat shield out of place. Save all bolts, washers and plastic rivets for re-installation of tail.

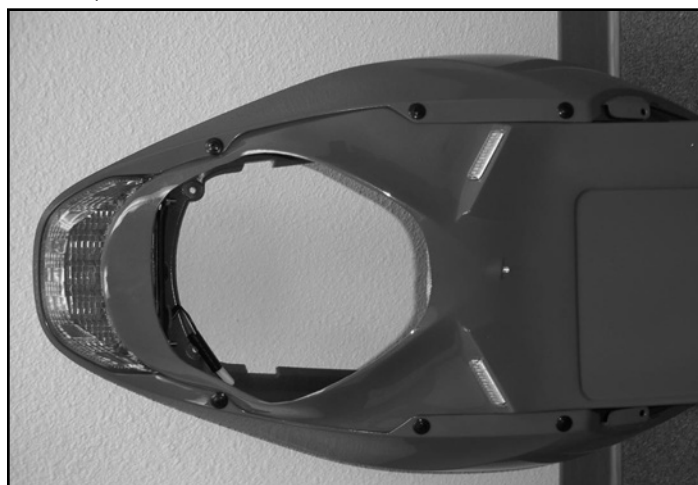

2) When tail section body work is removed, line up the undertail with tail section carefully marking holes from bottom to top, respectively on each side. Make sure tail is correctly lined up with tail section.

3) After drilling holes, test fit undertail on tail section, checking for proper alignment.

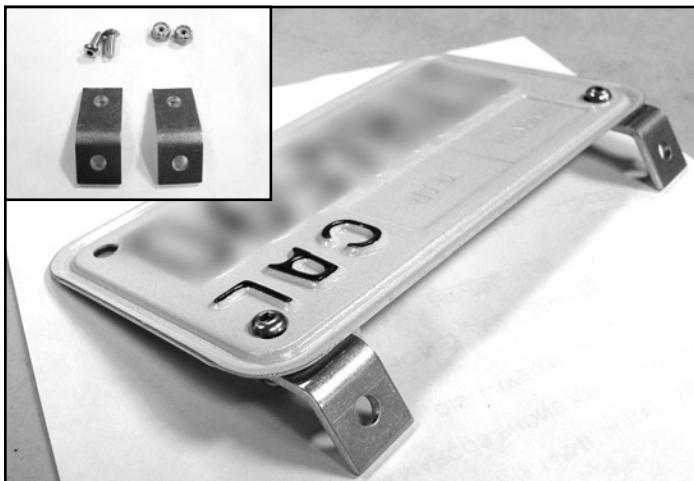

4) Install license plate brackets to back side of license plate as shown. Now hold license plate in desired location on undertail where it will not hit the rear tire. Carefully mark and drill holes, install using the two (2) sets of allen bolts and lock.

5) Make sure your exhaust is fully tightened and re-install all tail section plastics and connect the LED turn signals to the undertail. Use the plastic screw rivets to connect the undertail to the tail section.

WIRING INSTRUCTIONS: Connect the right (blue wire) and left signal (orange wire) wires on the bike, to the respective right/left orange wires on the undertail. The license plate light wire is black w/ brown tracer, connect to the red wire of the plate light. Connect the ground wires (green) to the black wires on the undertail.