



Rocker Guard


Part No. J027T

Fits: Jeep Wrangler JK Unlimited (4 Dr)	2007-2014
--	------------------

PARTS LIST:			
Qty	Part Description	Qty	Part Description
1	Driver/Left Rocker Guard Assembly	6	8-1.25mm x 35mm Hex Bolts
1	Passenger/Right Rocker Guard Assembly	6	8mm Lock Washers
6	10mm Nut Plates	6	8mm x 28mm OD x 3mm Flat Washers
6	10-1.5mm x 35mm Hex Bolts	12	6-1.0mm x 25mm Hex Bolts
6	10mm Lock Washers	24	6mm x 22mm OD x 2mm Flat Washers
6	10mm x 34mm OD x 3mm Flat Washers	12	6mm Nylon Lock Nuts

TOLL FREE SUPPORT: 866 638 4870

Install Time : 60 – 180 Minutes
(Professional Installation)
 Install Note : Factory installed or aftermarket "rock rails," Side steps or running boards must be removed. Assistance is highly recommended.

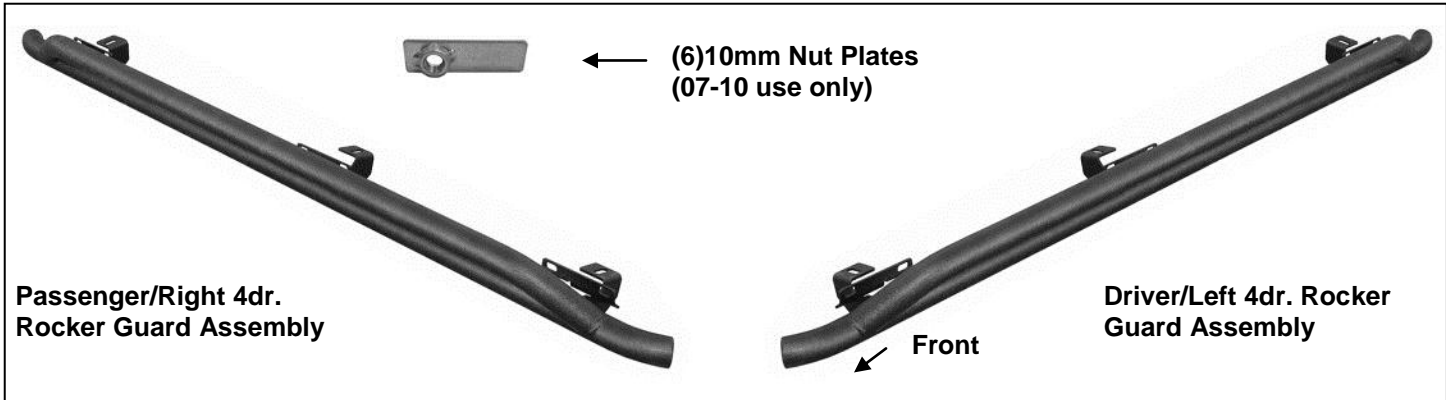


REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT


READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION

INSTALLATION PROCEDURE

1. Start installation on the driver side of the vehicle. Determine if the vehicle has an open floor panel, (2007-10, **Figure 1**), or threaded holes in the floor panel, (2010-13, **Figure 2**), for the top tab on the Bracket.

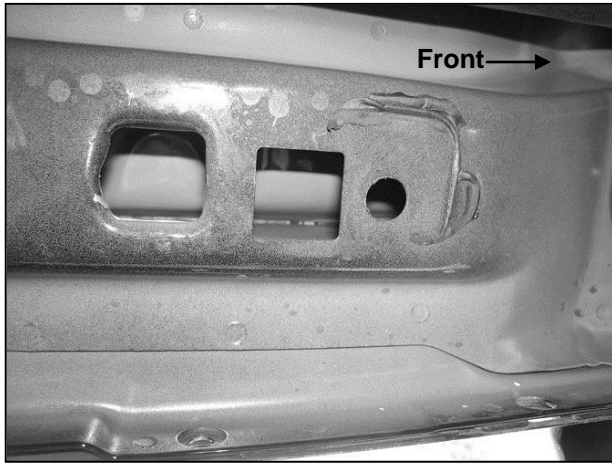

(Fig 1) 2007-10 driver side front mounting location

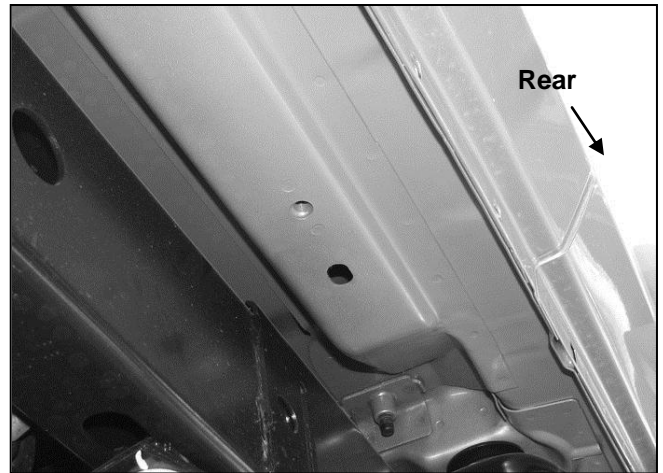


(Fig 2) Example of 2010-13 "closed" floor panel with threaded hole-10mm Nut Plate not required

Vehicles with threaded hole in body panel use:
 8mm x 35mm Hex Bolt
 8mm Lock Washer
 8mm Flat washer



Vehicles with open mounting location: Insert (1) 10mm Nut Plate into the large square opening in the floor panel, (Figures 3, 4A & 4B). Line up the nut with the factory hole. **IMPORTANT:** To determine correct mounting hole, find the two holes in the pinch weld. Locate the mid point between the two holes. Line up the threaded nut with the small hole directly in line with the mid point, (Figure 3). This applies to front and rear mounting locations.

Bolt each top tab on the Rocker Guard to the Nut Plate with (1) 10mm x 35mm Hex Bolt, (1) 10mm Lock Washer and (1) 10mm Flat Washer, (Figure 5). Repeat for all mounting locations.

Vehicles with factory threaded holes in floor panel: Bolt each tab on the Rocker Guard to the threaded hole in the floor panel with (1) 8mm x 35mm Hex Bolt, (1) 8mm Lock Washer and (1) 8mm Flat Washer, (Figures 2 & 5).

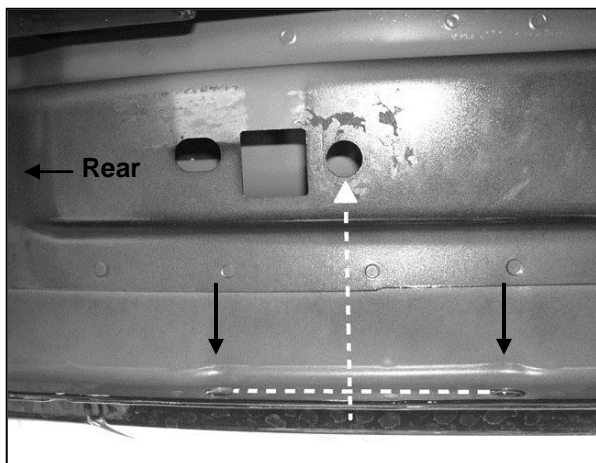


(Fig 3) 2007-10 driver side rear mounting location pictured. Locate the holes in the pinch weld to determine correct hole for 10mm Nut Plate

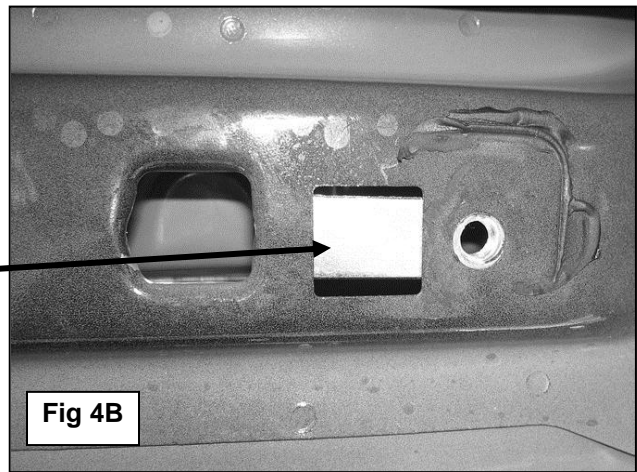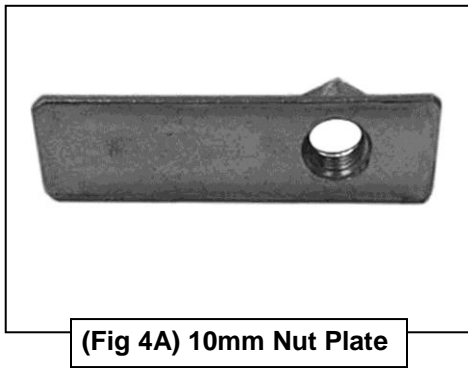


(2) 6mm Flat Washers
(2) 6mm Nylon Lock Nuts


2010 - 12 vehicles with threaded hole in floor panel use:
8mm x 35mm Hex Bolt
8mm Lock Washer
8mm Flat washer

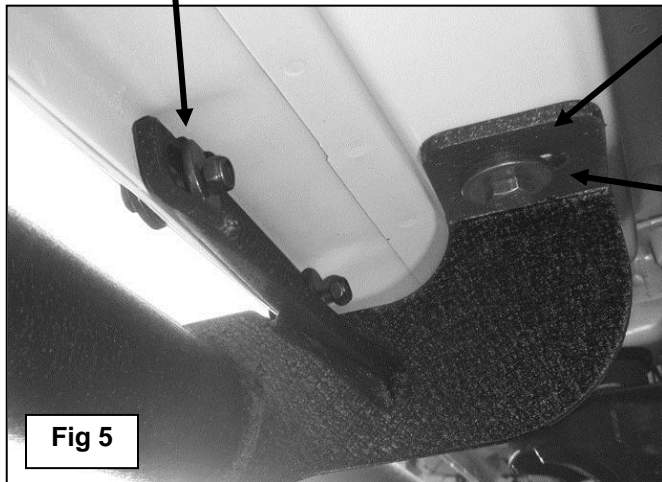

07 - 10 with "open" floor panel using 10mm Nut Plate:
10mm x 35mm Hex Bolt
10mm Lock Washer
10mm Flat Washer

2. Line up the (3) vertical mounting plates on the Rocker Guard with the (6) factory holes in the pinch weld. Bolt the plates to the **back** of the pinch weld using the included (6) 6mm x 25mm Hex Bolts, (12) 6mm Flat Washers and (6) 6mm Nylon Lock Nuts, **(Figures 5 & 6)**. Leave loose at this time.
3. Adjust the Rocker Guard and tighten all hardware.
4. Repeat **Steps 1 - 3** for passenger Rocker Guard installation.
5. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

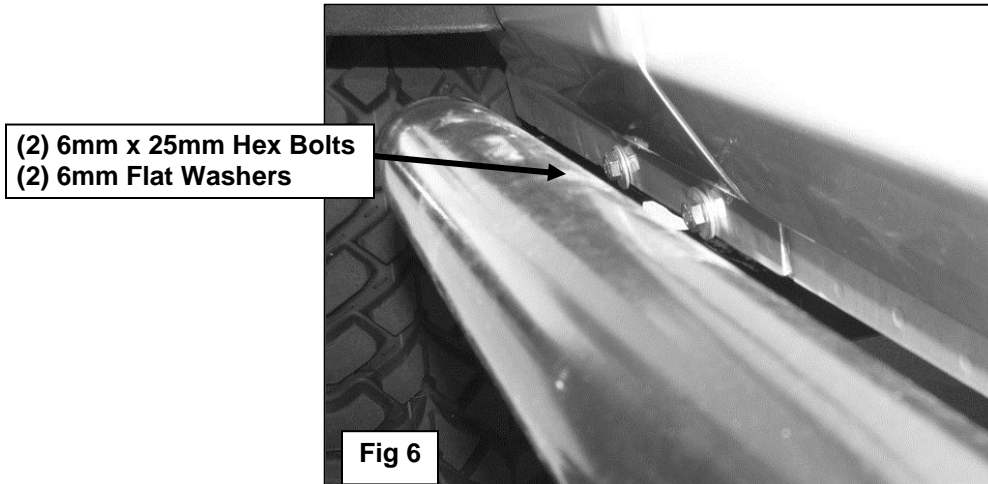

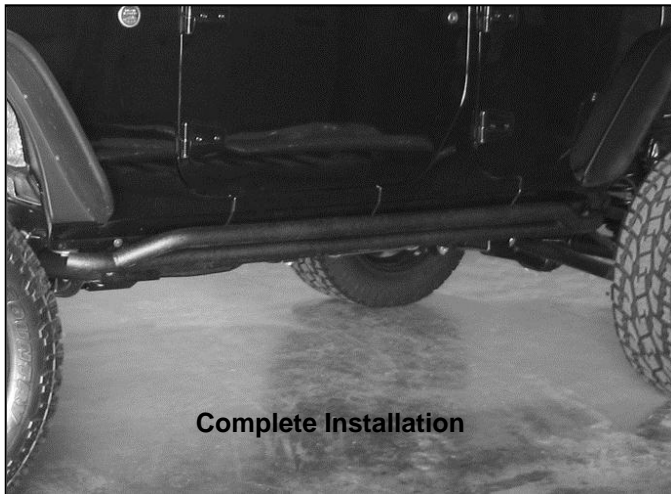

Do periodic inspections to the installation to make sure that all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Sidebar.

For gloss black finishes: Mild soap may be used to clean the Products.

Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.